

TECHNICAL DATA:


Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	16,76 x 10,63m
Device height:	12,00m
Minimum space:	19,46 x 12,61m
Falling area:	128,15m ²
Critical fall height:	2,00m
Foundations depth:	-1,00m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

- Safety surfaces:
- sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 300+100mm
 - synthetic surface according to critical fall height

Top view with impact area

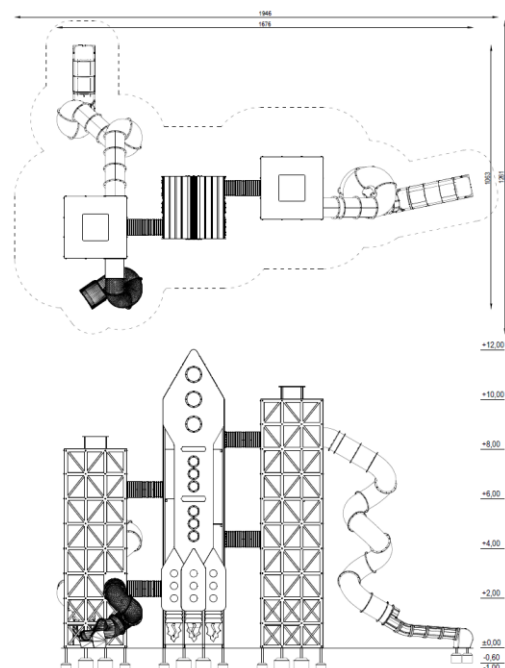


COMPONENTS:

Roofed tower A, height 8,00m	1 pc
Roofed tower B, height 10,00m	1 pc
"Rocket" tower, height 12,00m	1 pc
Vertical ladder	12pcs
Diagonal rope pass	6 pcs
Spiral slide, height 2,00m	1 pc
Spiral slide, height 6,00m	1 pc
Spiral slide, height 8,00m	1 pc
Tunnel passage	4 pcs
Applications "Rocket"	2 sets
Applications "Truss A"	1 set
Applications "Truss B"	1 set

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Flat decorative elements:	HDPE sheets, polycarbonate, aluminum net
Platforms, gangways:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Spiral slide:	rotomolded plastic
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Tunnel:	PVC pipe fastened to HDPE boards
Caps:	plastic
Foundations:	concrete min. C12/15 standard

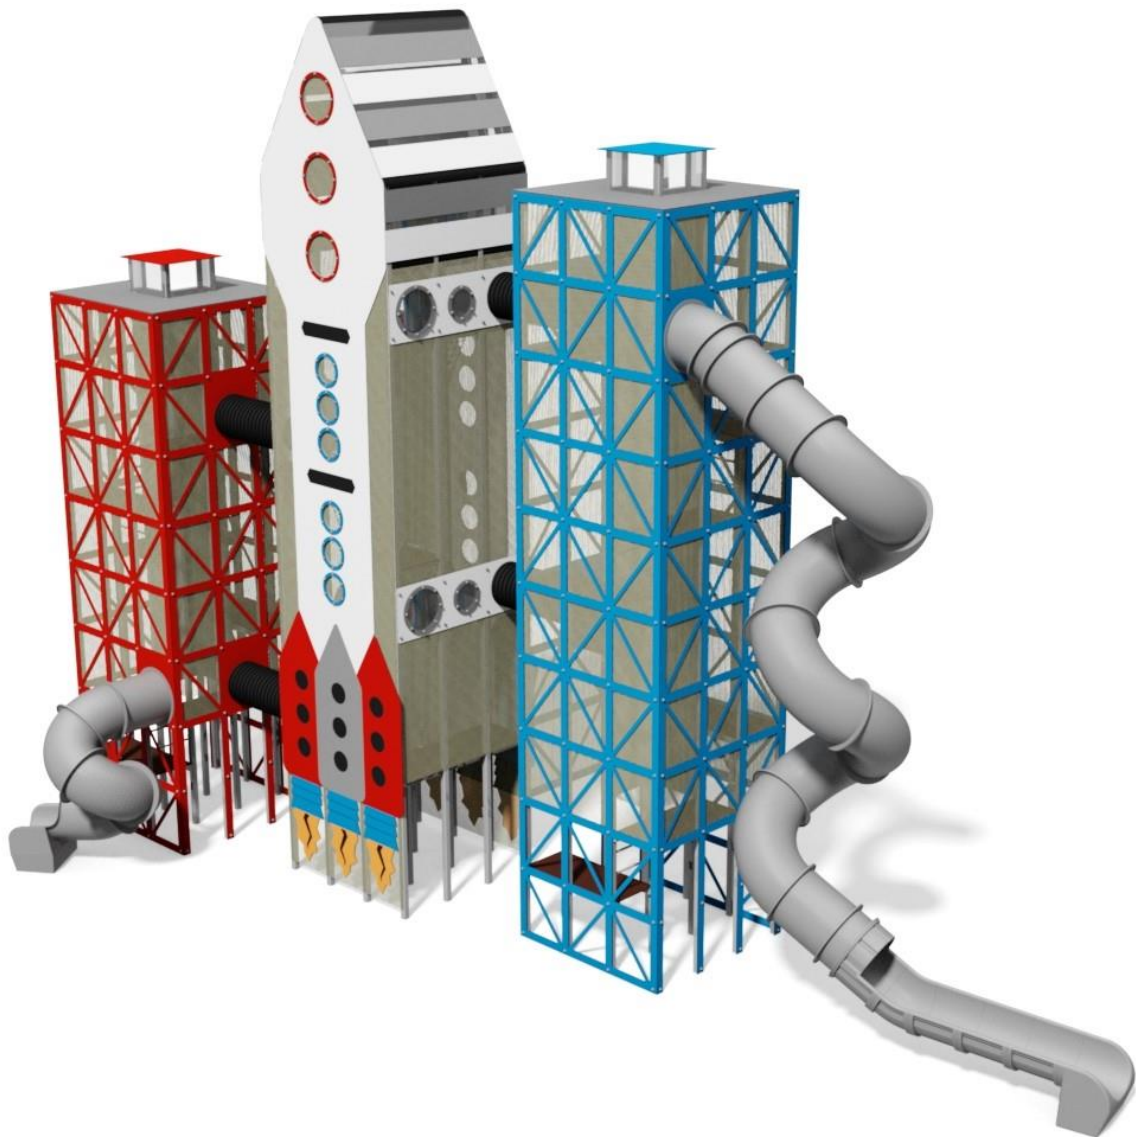

GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.