

TECHNICAL DATA:

Not easily accessible device, according to standard EN 1176-1:2017


Device dimensions: 5,81 x 4,68m
Device height: 3,80m
Minimum space: 9,76 x 7,58m
Falling area: 59,65m²
Critical fall height: 2,20m
Foundations depth: -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods.

Safety surfaces:

- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 300+100mm $\,$
- synthetic surface according to critical fall height

Projection and device view

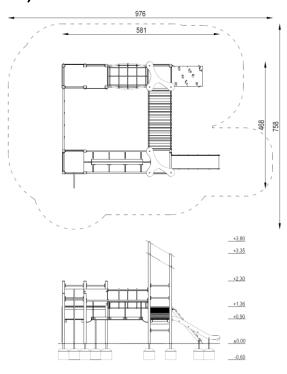

COMPONENTS: MATERIALS: Tower without roof, platform 0,90m 1 pc Construction poles: steel square profiles, galvanized, Tower without roof, platform 1,36m 2 pcs powder coated in gray Tower with roof, platform 0,90m 1 pc Flat decorative elements: HDPE sheets Tower with roof, platform 1,36m 1 pc Platforms, gangways: waterproof plywood, with non-slip Slope climbing wall 1,36m 1 pc layer, based on steel structure Vertical ladder 1 pc Steel elements: galvanized steel, powder coated Slide 0,90m 1 pc Chains: galvanized steel Fireman's pole 0,90m 1 pc Surface of slide: Rope bridge stainless steel 1 pc Slope bridge 1 pc Climbing walls: waterproof plywood, Movable bridge 1 pc climbing grips based on resins Vertical rope net 1 pc polypropylene braided with a steel, Ropes: interconnected by plastic fasteners Caps: plastic concrete min. C12/15 standard Foundations:



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.