

TECHNICAL DATA:


Easily accessible device,
according to standard EN 1176-1:2017

Device dimensions: 16,78 x 4,50m
 Device height: 3,95m
 Minimum space: 18,47 x 3,92m
 Falling area: 54,40m²
 Critical fall height: 0,95m
 Foundations depth: -0,60m

The device according to EN 1176-1:2017
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods

Safety surfaces:
 - turf / topsoil, sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials
 200+100mm
 - synthetic surface according to critical fall height

Top view with impact area

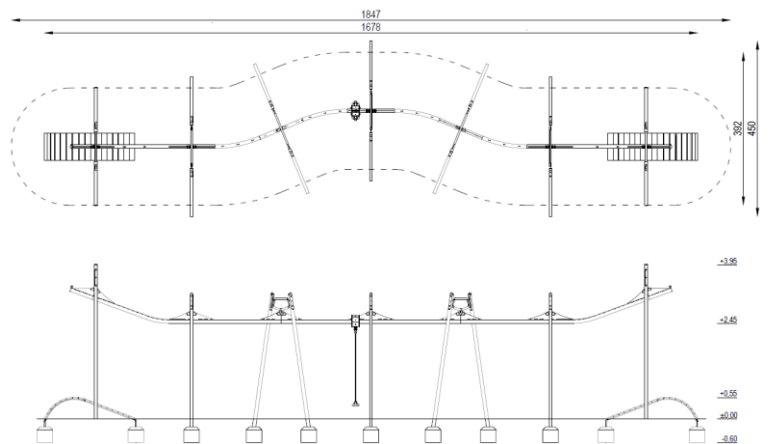

MATERIALS:

Construction poles:	steel profile, galvanized, powder coated
Structural elements construction:	galvanized steel
Seat:	made of rubber-coated metal construction, certified
Starting platforms:	construction made of galvanized steel, waterproof plywood platform
Caps:	plastic
Trolley:	construction made of stainless steel, polyurethane rollers * with ball bearings
Foundations:	concrete class C12 / 15

* The rollers are a consumable item, which over time can wear out

FUNCIONALITY:

- Take the ride back and forth without the need to leave
- Rail mechanism, without adjustment and / or lubrication
- The device does not generate noise during the usage

LIST OF ELEMENTS:

- Module „Stop & Go” 1 set
- Module „Bend” 4 pcs



SEAT FOR DISABLED PEOPLE
(optional mounting)



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.